



VarioForce - 1 Ramal

Eslinga de elevación versátil diseñada para la elevación segura y precisa de cargas asimétricas.

Nombre corto del Item	CMU [kg]	Anilla maestra	Ganchos	L1 [m]	Longitud ajustable [m]	Peso Neto [kg]
VF1-1000-1EH/C 1,5m T	1000	MLF-86-10	ESHC-6-10	1.5	0.5	1.6
VF1-1000-1EH/C 2,5m T	1000	MLF-86-10	ESHC-6-10	2.5	1	1.7
VF1-1000-1EH/C 4m T	1000	MLF-86-10	ESHC-6-10	4	1	1.8
VF1-2000-1EH/C 1,5m T	2000	MLF-86-10	ESHC-8-10	1.5	0.5	3.0
VF1-2000-1EH/C 2,5m T	2000	MLF-86-10	ESHC-8-10	2.5	1	3.3
VF1-2000-1EH/C 4m T	2000	MLF-86-10	ESHC-8-10	4	1	3.5
VF1-3000-1EH/C 2,5m T	3000	MLF-108-10	ESHC-10-10	2.5	1	5.9
VF1-3000-1EH/C 4m T	3000	MLF-108-10	ESHC-10-10	4	1	6.3



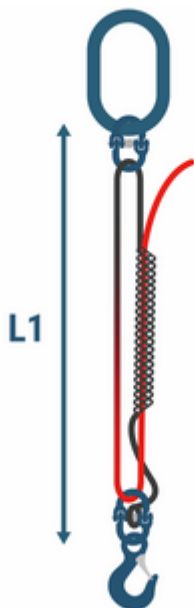

REFERENCIAS DE PEDIDO[Global Item Number/Local ERP Number SSES]

Dimensión L1	1000 kg	2000 kg	3000 kg
1.5 m	2028449 RHVFD0953970001	2028484 RHVFD0954020001	-
2.5 m	2028450 RHVFD0953990001	2028485 RHVFD0954030001	2028488 RHVFD0954120001
4 m	2028451 RHVFD0954000001	2028486 RHVFD0954110001	2028489 RHVFD0954130001

■ Normas	based on EN 1492-2
■ Material principal	Polietileno de alto peso molecular (HMPE)
■ Color	Negro
■ Rango de temperatura	-40°C bis +60°C
■ Unidad de embalaje (PU) Contiene	1

1. In multileg-assemblies, containing a combination of VarioForce and round slings, the cover colour of the round slings is in accordance with EN 1492-2. The VarioForce-ropes are always black.

