




VarioForce 1-leg

Versatile lifting sling designed for the safe and precise hoisting of asymmetric loads.

Item Name short	WLL kg [kg]	Master Link	Hook Component	L1 [m]	Variable Length [m]	Weight Net [kg]
VF1-1000-1EH/C 1,5m T	1000	MLF-86-10	ESHC-6-10	1.5	0.5	1.6
VF1-1000-1EH/C 2,5m T	1000	MLF-86-10	ESHC-6-10	2.5	1	1.7
VF1-1000-1EH/C 4m T	1000	MLF-86-10	ESHC-6-10	4	1	1.8
VF1-2000-1EH/C 1,5m T	2000	MLF-86-10	ESHC-8-10	1.5	0.5	3.0
VF1-2000-1EH/C 2,5m T	2000	MLF-86-10	ESHC-8-10	2.5	1	3.3
VF1-2000-1EH/C 4m T	2000	MLF-86-10	ESHC-8-10	4	1	3.5
VF1-3000-1EH/C 2,5m T	3000	MLF-108-10	ESHC-10-10	2.5	1	5.9
VF1-3000-1EH/C 4m T	3000	MLF-108-10	ESHC-10-10	4	1	6.3



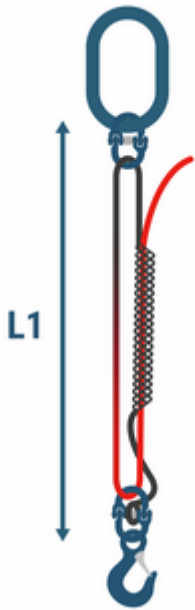

ORDER NUMBERS[Global Item Number/Local ERP Number SSUK]

Dimension L1	1000 kg	2000 kg	3000 kg
1.5 m	2028449	2028484	-
2.5 m	2028450	2028485	2028488
4 m	2028451	2028486	2028489

- **Norms** based on EN 1492-2
- **Main Material** High molecular weight polyethylene (HMPE)
- **Colour** Black
- **Temperature Range** -40°C bis +60°C
- **Packaging Unit (PU) Content** 1

1. In multileg-assemblies, containing a combination of VarioForce and round slings, the cover colour of the round slings is in accordance with EN 1492-2. The VarioForce-ropes are always black.

SpanSet (UK) Limited
Telford Way
Middlewich Cheshire
CW10 0HX United
Kingdom
+44 (0) 1606 737494
info@spanset.co.uk
www.spanset.co.uk



Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom

SpanSet
Certified
Safety