


Wspornik pierścieniowy do spawania VRBK

Especially for 90° edges. All-round load-bearing suspension bracket, can be swivelled up to 270°

Pozycja Nazwa skrócona	WLL kg Kąt 0 [kg]	WLL t Kąt 0 [t]	WLL kg Kąt 90° [kg]	WLL t Kąt 90° [t]	B [mm]	C [mm]	D [mm]
VRBK 4	4000	4	4000	4	14	28	48
VRBK 6.7	6700	6.7	6700	6.7	20	35	60
VRBK 10	10000	10	10000	10	22	46	65

Pozycja Nazwa skrócona	E [mm]	G [mm]	J [mm]	K [mm]	T [mm]	Waga netto [kg]
VRBK 4	141	79	30	32	65	1.05
VRBK 6.7	181	104	34	40	84	2.16
VRBK 10	212	116	46	52	94	4.4

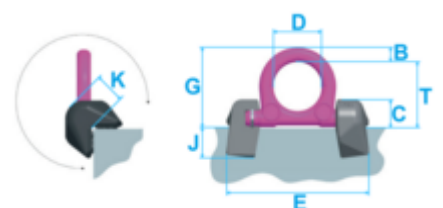

NUMERY ZAMÓWIEŃ[Global Item Number/Local ERP Number SSPL]

WLL kg Kąt 0	VRBK 4	VRBK 6.7	VRBK 10
4000 kg	2009234	-	-
6700 kg	-	2009251 10190	-
10000 kg	-	-	2009252

■ Standardy	EN 1677
■ Główny materiał	Stal
■ Kolor	Różowy
■ Jednostka opakowania (PU) Zawartość	1

