


Zelfsluitende ooghaak

Worden gebruikt om hijsstroppen in elkaar te zetten en worden ook gebruikt in de bouwindustrie

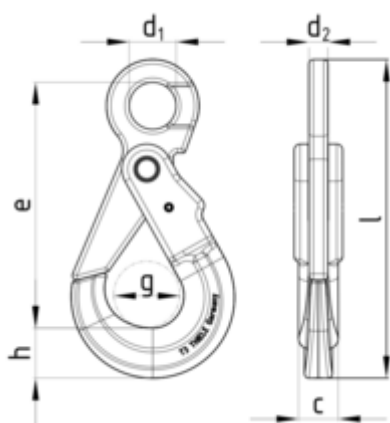

Item Naam kort	WLL [kg]	Kettingdiameter	WLL [t]	C [mm]	D [mm]	E [mm]	G [mm]
TWN1836 - 6mm	1400	6 mm	1.4	18	22	107	28
TWN1836 - 7-8mm	2500	7/8 mm	2.5	23	24	133	33
TWN 1836 - 10mm	4000	10 mm	4	27	32	167	45
TWN 1836A - 13mm	6700	13 mm	6.7	32.5	40	209	53.5
TWN 1836 13mm	6700	13 mm	6.7	34	39	205	52
TWN 1836A - 16mm	10000	16 mm	10	38	50	254	62
TWN 1836 - 16mm	10000	16 mm	10	41	49	262	64
TWN 1836 - 20mm	16000	20 mm	16	49	59	282	77
TWN 1836A - 22mm	19000	22 mm	19	52	70	319.5	80
TWN 1836 - 22mm	19000	22 mm	19	57	70	310	92

Item Naam kort	H [mm]	Lopende meter [kg]
TWN1836 - 6mm	22	0.52
TWN1836 - 7-8mm	25	0.88
TWN 1836 - 10mm	34	1.63
TWN 1836A - 13mm	40.5	40.5
TWN 1836 13mm	40	3.20
TWN 1836A - 16mm	50.5	5.82
TWN 1836 - 16mm	53	6.20
TWN 1836 - 20mm	54	9.27
TWN 1836A - 22mm	66	11.74
TWN 1836 - 22mm	75	13.62



BESTELNUMMERS[Global Item Number/Local ERP Number SSNL]

Kettingdiameter	TWN1836 - 6mm	TWN1836 - 7-8mm	TWN 1836 - 10mm	TWN 1836 13mm	TWN 1836A - 13mm	TWN 1836 - 16mm	TWN 1836A - 16mm	TWN 1836 - 20mm	TWN 1836 - 22mm	TWN 1836A - 22mm
6 mm	2030492	-	-	-	-	-	-	-	-	-
10 mm	-	-	2030494	-	-	-	-	-	-	-
13 mm	-	-	-	2030495	2030496	-	-	-	-	-
16 mm	-	-	-	-	-	2030497	2030498	-	-	-
20 mm	-	-	-	-	-	-	-	2030499	-	-
22 mm	-	-	-	-	-	-	-	-	2030500	2030501
7/8 mm	-	2030493	-	-	-	-	-	-	-	-

- Graden 100
- Hoofdmateriaal Staal
- Kleur Blauw
- Verpakkingseenheid (PU) Inhoud 1

