

## Safe Clearance Heights For SpanSet DSL & SSL


Height Safety  
Lifting  
Load Control  
Safety Management

When using fall arrest techniques and equipment it is important that the user is aware of the safe clearance distance required below their feet. The clearance distance includes;

- The distance required for the equipment to safely arrest a falling user.
- An additional metre to provide a gap between the arrested user and the hazard below.

Using the tables in this document you can identify the anchor position and work out the safe clearance distance required.

### Identify Your Anchor Point ● and read off the Safe Clearance you need Below Foot Level

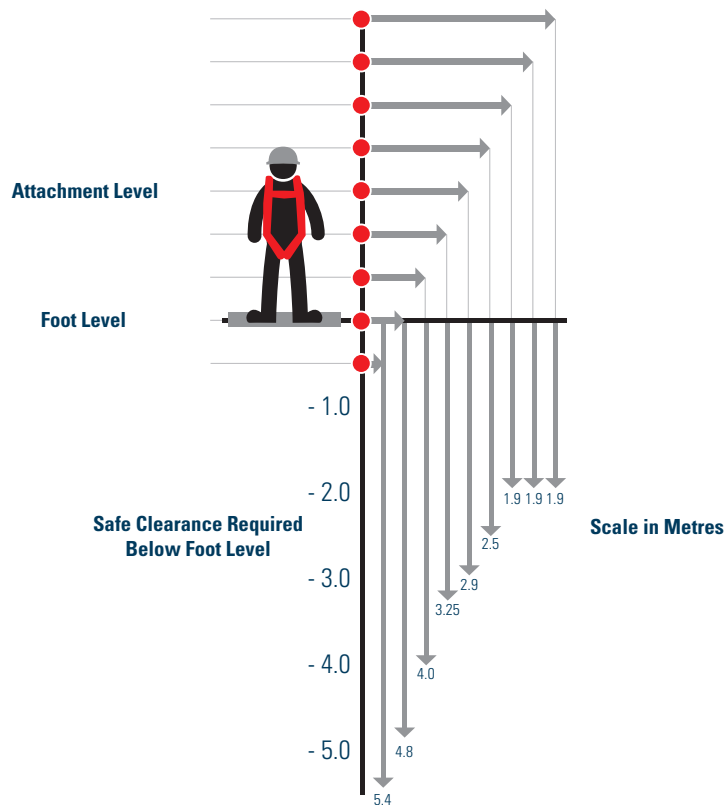

All clearances include the arrest distance plus one metre as set out in the EN Standard

The SpanSet Double Self Retracting Lanyards (DSL's) and Single Self Retracting Lanyards (SSL's) have been independently tested by the Notified Body SATRA.

Testing covered all the worst case scenarios including those where;


- The anchorage is at the maximum extension below the user
- In the case of the DSL both legs are attached to an anchorage at the maximum extension below the user in all cases the mass was arrested with an impact force below the required 6kN. The clearance heights take into account the full length of the device having arrested the fall and an additional metre as set out in the standard to ensure there is a clear gap between the user and the obstacle beneath them.

SpanSet DSL's and SSL's are Tested to be "Fit For Purpose".

## Applications For SpanSet DSL & SSL


Height Safety  
Lifting  
Load Control  
Safety Management

### Standard Applications

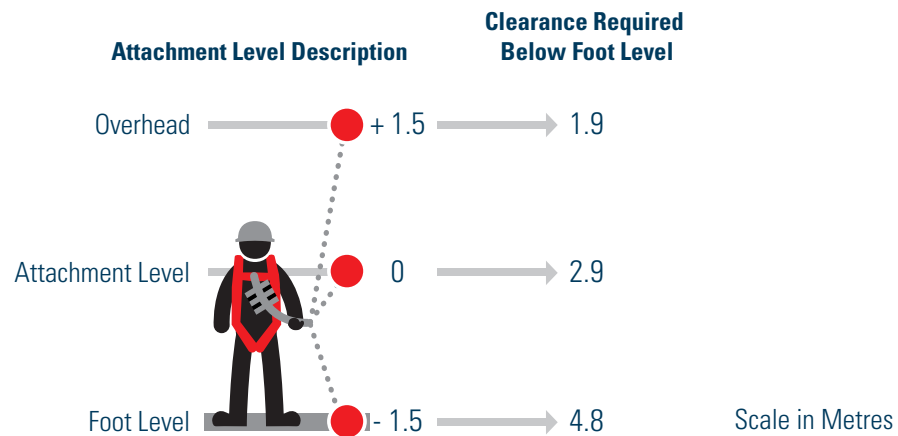

The DSL has been independently tested in all the worst case scenerios. In all cases impact forces remain below 6kN even when attached below at maximum extension or with both legs attached below at maximum extensions. SpanSet DSL tested to be fit for purpose.

### Scaffold Applications

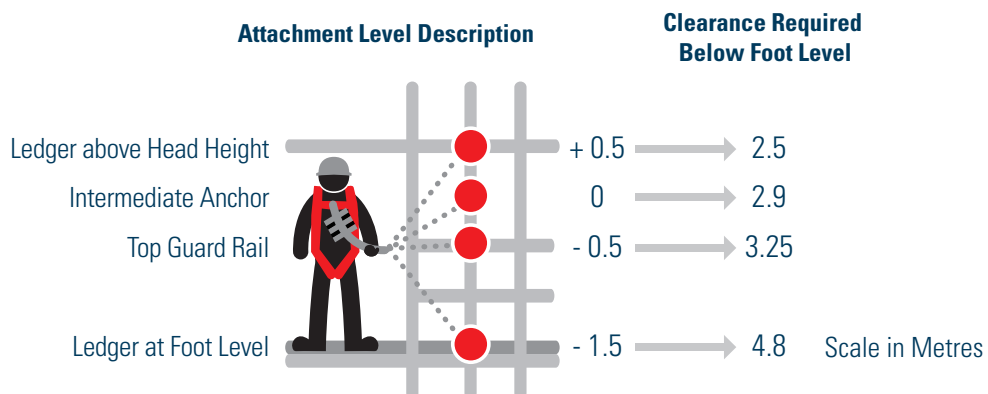

When attaching to Scaffold always check the integrity of the anchorage point you intend to use. In the case of system scaffold you should ensure the selected anchorage point is approved for use by the manufacturer.



---

---

## Edge Testing

---

---

---

---

**Height Safety**  
**Lifting**  
**Load Control**  
**Safety Management**

---


---

The DSL and SSL has been designed for use in a wide variety of applications commonly encountered in the workplace. The materials incorporated in the DSL and SSL were carefully selected to meet the demands of those applications.

One common concern during a fall is the likelihood that the users lanyard will come into contact with other materials such as roof edges or structural beams for example and understanding the effect this may have. The current European Standards do not provide any criteria for Edge testing. There is however a draft standard produced by the VG11 working group.

SpanSet have carried out edge testing in accordance with the VG11 guidance and can confirm the DSL and SSL are both suitable for use in applications where they may come into contact with edges whilst arresting falls.

## SP140 SINGLE FIXED LENGTH LANYARD

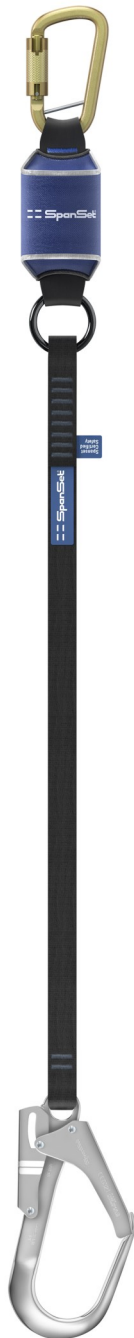

### Product Codes

FAA-05C09 (1.0m working length)

FAA-01C09 (2.0m working length)

### DESCRIPTION

Single leg fall arrest lanyard.

The SP140 energy absorbing pack has a protective cover which can be removed for inspection and a “clip back” ring.

The duplex construction increase the resistance to small radius edges during a fall.

### SPECIFICATION

- Duplex polyester lanyard
- SP140 energy absorbing pack for workers up to 140kg in weight
- User connection: steel auto-lock karabiner with captivating pin
- Anchor connection: steel scaffold hook with >50mm gate opening
- Clip Back Ring to allow lanyard to loop around an anchor

### MATERIALS

- Polyester lanyard webbing
- Mild steel connectors with zinc finish
- Mild steel ring with ED Black finish

### TYPE APPROVAL

EN355:2002

### NOTE(S)

Suitable for use as part of a fall protection system.

10 year maximum lifespan

## SP140 SINGLE FIXED LENGTH LANYARD



### Product Codes

FAA-01C01 (2.0m working length)

### DESCRIPTION

Single leg fall arrest lanyard.

The SP140 energy absorbing pack has a protective cover which can be removed for inspection and a “clip back” ring.

The duplex construction increase the resistance to small radius edges during a fall.

### SPECIFICATION

- Duplex polyester lanyard
- SP140 energy absorbing pack for workers up to 140kg in weight
- Connections: steel auto-lock karabiner with captivating pin
- Clip Back Ring to allow lanyard to loop around an anchor

### MATERIALS

- Polyester lanyard webbing
- Mild steel connectors with zinc finish
- Mild steel ring with ED Black finish

### TYPE APPROVAL

EN355:2002

### NOTE(S)

Suitable for use as part of a fall protection system.

10 year maximum lifespan