




Chain TWN 0805

Grade 80 chain, made from CrNiMo alloy steel and are used to assemble chain slings and lashing chains

Item Name short	WLL kg [kg]	Chain Diameter	WLL t [t]	Width Inside [mm]	Width Outside [mm]	P [mm]	Weight Net [kg]
TWN-0805-6mm	1120	6 mm	1.12	7.80	22.20	18	0.82
TWN-0805- 7mm	1500	7 mm	1.50	9.50	25.90	21	1.10
TWN-0805-22mm	1500	22 mm	15	28.60	81.40	66	10.90
TWN- 0805-10mm	3150	10 mm	3.15	13	37	30	2.26
TWN- 0805-13mm	5300	13 mm	5.30	17.40	48.10	39	3.76
TWN- 0805-16mm	8000	16 mm	8	20.80	59.20	48	5.70
TWN-0805-18mm	10000	18 mm	10	23.40	66.60	54	7.10
TWN-0805-20mm	12500	20 mm	12.50	26	74	60	9

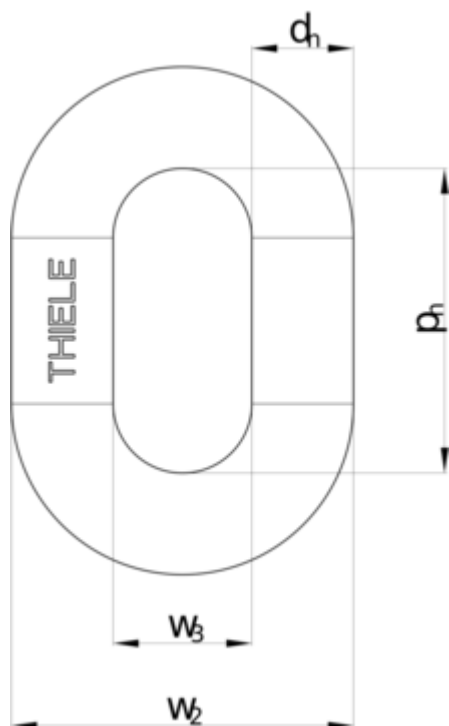

ORDER NUMBERS[Global Item Number/Local ERP Number SSNL]

Chain Diameter	TWN-0805-6mm	TWN-0805-7mm	TWN- 0805-10mm	TWN- 0805-13mm	TWN- 0805-16mm	TWN-0805-18mm	TWN-0805-20mm	TWN-0805-22mm
6 mm	2030925	-	-	-	-	-	-	-
10 mm	-	-	2030929	-	-	-	-	-
13 mm	-	-	-	2030930	-	-	-	-
16 mm	-	-	-	-	2030931	-	-	-
7 mm	-	2030927	-	-	-	-	-	-
20 mm	-	-	-	-	-	-	2030933	-
22 mm	-	-	-	-	-	-	-	2030934
18 mm	-	-	-	-	-	2030932	-	-

■ Grade	100
■ Main Material	Steel
■ Colour	Silver
■ Packaging Unit (PU) Content	1

SpanSet Nederland B.V.
 Plaza 10A 4782 SK
 Moerdijk Nederland
 Tel.: +31 (0) 168 38 68 00
info@spanset.nl
www.spanset.nl



Subject to technical changes. All rights reserved. No part of this technical data sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed via electronic systems without the written permission of SpanSet. This technical data sheet has been compiled with due care; SpanSet accepts no liability for errors or omissions. © SpanSet Nederland B.V.

**SpanSet
Certified
Safety**