


Eyebolt VRS-F StarPoint Vario

360° turnable and loadable eyebolt with key plate for easy mounting

Item Name short	WLL kg Angle 0° [kg]	WLL t Angle 0° [t]	WLL kg Angle 90° [kg]	WLL t Angle 90° [t]	B [mm]	C [mm]	D [mm]
VRS-F-M6 Vario	500	0.5	100	0.1	9	7	20
VRS-F-M8	800	0.8	300	0.3	11	9	25
VRS-F-M10 Vario	1000	1	400	0.4	11	9	25
VRS-F-M12	2000	2	750	0.75	13	10	30
VRS-F-M16	4000	4	1500	1.5	15	13	35
VRS-F-M20	6000	6	-	2.3	17	16	40
VRS-F-M24	8000	8	3200	3.2	20	19	49
VRS-F-M30	12000	12	4500	4.5	26	24	60
VRS-F-M36	16000	16	7000	7	32	29	72
VRS-F-M42	24000	24	9000	9	37	33	84
VRS-F-M48	32000	32	12000	12	42	42	94

Item Name short	E [mm]	G [mm]	I [mm]	J [mm]	K [mm]	L [mm]	M [mm]
VRS-F-M6 Vario	23	28	13	0 - 300	37	-	6
VRS-F-M8	25	30	16.3	-	47	-	8
VRS-F-M10 Vario	25	30	16.3	-	47	16 - 70	10
VRS-F-M12	30	34	19.8	-	56	18 - 150	12
VRS-F-M16	36	40	23.5	-	65	24 - 120	16
VRS-F-M20	41	50	29.3	-	76	30 - 160	20
VRS-F-M24	51	60	35	-	92	36 - 140	24
VRS-F-M30	66	75	44	-	114	45 - 190	30
VRS-F-M36	76	97	53	-	135	-	36
VRS-F-M42	86	111	62	-	158	-	42
VRS-F-M48	100	128	70	-	180	-	48

Item Name short	N [mm]	T [mm]	Weight Net [kg]
VRS-F-M6 Vario	6	28	0.07
VRS-F-M8	6	35	0.1

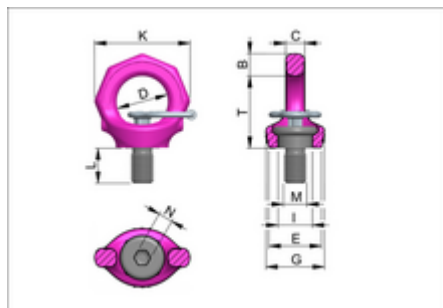

Item Name short	N [mm]	T [mm]	Weight Net [kg]
VRS-F-M10 Vario	6	34	0.1
VRS-F-M12	8	42	0.2
VRS-F-M16	10	49	0.3
VRS-F-M20	12	58	0.5
VRS-F-M24	14	70	0.9
VRS-F-M30	17	87	1.7
VRS-F-M36	22	103	2.9
VRS-F-M42	24	121	4.6
VRS-F-M48	27	138	7

ORDER NUMBERS[Global Item Number/Local ERP Number SSUK]

Dimension L	500 kg	800 kg	1000 kg	2000 kg	4000 kg	6000 kg	8000 kg	12000 kg	16000 kg	24000 kg	32000 kg
-	2020376	2020377	-	-	-	-	-	-	2020389	2020392	2020394
16 - 70 mm	-	-	2020378	-	-	-	-	-	-	-	-
18 - 150 mm	-	-	-	2020379	-	-	-	-	-	-	-
24 - 120 mm	-	-	-	-	2020380	-	-	-	-	-	-
30 - 160 mm	-	-	-	-	-	2020382	-	-	-	-	-
36 - 140 mm	-	-	-	-	-	-	2020385	-	-	-	-
45 - 190 mm	-	-	-	-	-	-	-	2020387	-	-	-

■ Norms	ISO 12100 EN 1677-1
■ Main Material	Steel
■ Colour	Pink
■ Temperature Range	-40° C to + 100° C
■ Packaging Unit (PU) Content	1

SpanSet (UK) Limited
Telford Way
Middlewich Cheshire
CW10 0HX United
Kingdom
+44 (0) 1606 737494
info@spanset.co.uk
www.spanset.co.uk



Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom

SpanSet
Certified
Safety