

SAVERLINE

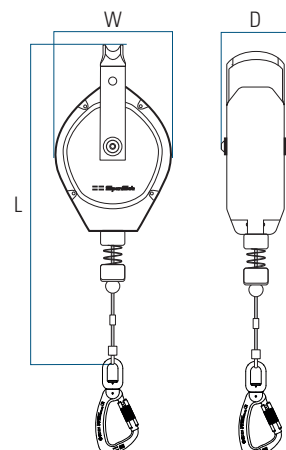
Height Safety
Lifting
Load Control
Safety Management

Saverline - SRL STU A S 18 ATA

The Saverline - SRL AS Series, aluminium housed fall arrest block is a sturdy, low maintenance device fitted with a steelrope. The attachment anchorage point on the fall arrest block is an open steel handle, suitable for connection via a Large Karabiner type connector, or a Standard Karabiner type connector with an Anchorage Sling. The lifeline in this fall arrest block has been tested in a simulated fall over an edge and passed VG11 CNB/P/11.060 additional test requirements for EN360. However, not all «edges» will react in the same way as the tested steel edge, so when using this fall arrest block, every effort must be made to ensure that in the event of an arrested fall, the lifeline does not pass over an edge.

Lifeline Material	Galvanised Steel Cable
Lifeline Length	18 m
Lifeline Width	Ø 4.8 mm
Attachment point	Steel Handle
Weight	9.5 kg
Capacity Load	136 kg
Dimensions (L x W x D)	550 x 240 x 100 mm
Anchor Hook	No anchor hook needed
Connection	2002205
Arrest Force	< 6 kN
Edge Tested	CNB/P/11.060 (r = ≥ 0,5 mm) + ANSI/ASSE Z 359.14-2014 (r = ≥ 0,13 mm)
Body Material (ext)	Aluminium
Chassis Material (int)	Stainless Steel
Certification	EN 360, ANSI/ASSE Z359.1-2007, ANSI/ASSE Z359.14-2014 *1
Temperature range	-40° C to + 50° C
Lifespan	10 Years

*1 CSAZ259.2.2 only with French Label available

**Saverline - SRL STU A S 18 ATA**

Global Item Number	2002362
EAN Code	7610726104307
Package Contents	Manual with SpanSet-Design