


Clevis Hooks with Safety Latch

Direct attachment hook to assemble universal chain slings and lashing chains

Item Name short	WLL kg [kg]	Chain Diameter	WLL t [t]	C [mm]	E [mm]	G [mm]	H [mm]
TWN 1340/1 - 6mm	1120	6 mm	1.12	17	76	20	20
TWN 1340/1 - 8mm	2000	8 mm	2	22	95	27	25
TWN 1340/1 - 10mm	3150	10 mm	3.15	28	114	34	32
TWN 1340/1 - 13mm	5300	13 mm	5.3	35	134	41	41
TWN 1340/1 - 16mm	8000	16 mm	8	42	162	48	50
TWN 1340/1 - 20mm	12500	20 mm	12.5	51	201	59	58
TWN 1340/1 - 22mm	15000	22 mm	15	55	224	68	62

Item Name short	Weight Net [kg]	Colour
TWN 1340/1 - 6mm	0.36	Red
TWN 1340/1 - 8mm	0.76	Red
TWN 1340/1 - 10mm	1.41	Red
TWN 1340/1 - 13mm	2.48	Blue
TWN 1340/1 - 16mm	4.4	Red
TWN 1340/1 - 20mm	8.57	Red
TWN 1340/1 - 22mm	11.46	Red

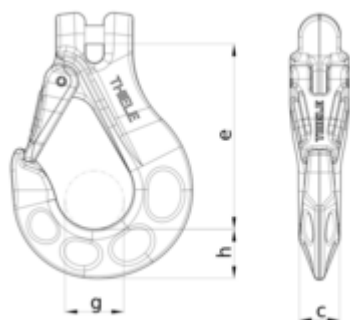

ORDER NUMBERS[Global Item Number/Local ERP Number SSNL]

Chain Diameter	TWN 1340/1 - 6mm	TWN 1340/1 - 8mm	TWN 1340/1 - 10mm	TWN 1340/1 - 13mm	TWN 1340/1 - 16mm	TWN 1340/1 - 20mm	TWN 1340/1 - 22mm
6 mm	2030895	-	-	-	-	-	-
8 mm	-	2030896	-	-	-	-	-
10 mm	-	-	2030897	-	-	-	-
13 mm	-	-	-	2030898	-	-	-
16 mm	-	-	-	-	2030899	-	-
20 mm	-	-	-	-	-	2030900	-
22 mm	-	-	-	-	-	-	2030901

- Grade 80
- Main Material Steel

SpanSet Nederland B.V.
 Plaza 10A 4782 SK
 Moerdijk Nederland
 Tel.: +31 (0) 168 38 68 00
 info@spanset.nl
 www.spanset.nl



Subject to technical changes. All rights reserved. No part of this technical data sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed via electronic systems without the written permission of SpanSet. This technical data sheet has been compiled with due care; SpanSet accepts no liability for errors or omissions. © SpanSet Nederland B.V.

**SpanSet
 Certified
 Safety**

