


Eyebolt VRS-F StarPoint

360° turnable and loadable eyebolt with key plate for easy mounting

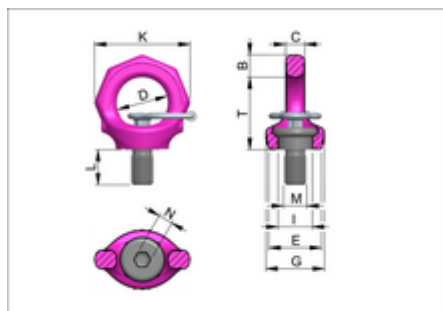

Item Name short	WLL kg Angle 0° [kg]	WLL t Angle 0° [t]	WLL kg Angle 90° [kg]	WLL t Angle 90° [t]	B [mm]	C [mm]	D [mm]
VRS-F-M6	500	0.5	100	0.1	9	7	20
VRS-F-M8	800	0.8	300	0.3	11	9	25
VRS-F-M10	1000	1	400	0.4	11	9	25
VRS-F-M12	2000	2	750	0.75	13	10	30
VRS-F-M16	4000	4	1500	1.5	15	13	35
VRS-F-M20	6000	6	2300	2.3	17	16	40
VRS-F-M24	8000	8	3200	3.2	20	19	49
VRS-F-M30	12000	12	4500	4.5	26	24	60
VRS-F-M36	16000	16	7000	7	32	29	72
VRS-F-M42	24000	24	9000	9	37	33	84
VRS-F-M48	32000	32	12000	12	42	42	94

Item Name short	E [mm]	G [mm]	I [mm]	K [mm]	L [mm]	M [mm]	N [mm]
VRS-F-M6	23	28	13	37	9	6	6
VRS-F-M8	25	30	16.3	47	12	8	6
VRS-F-M10	25	30	16.3	47	15	10	6
VRS-F-M12	30	34	19.8	56	18	12	8
VRS-F-M16	36	40	23.5	65	24	16	10
VRS-F-M20	41	50	29.3	76	30	20	12
VRS-F-M24	51	60	35	92	36	24	14
VRS-F-M30	66	75	44	114	45	30	17
VRS-F-M36	76	97	53	135	54	36	22
VRS-F-M42	86	111	62	158	63	42	24
VRS-F-M48	100	128	70	180	72	48	27

Item Name short	T [mm]	Weight Net [kg]
VRS-F-M6	28	0.07
VRS-F-M8	35	0.1
VRS-F-M10	34	0.1



Item Name short	T [mm]	Weight Net [kg]
VRS-F-M12	42	0.2
VRS-F-M16	49	0.3
VRS-F-M20	58	0.5
VRS-F-M24	70	0.9
VRS-F-M30	87	1.7
VRS-F-M36	103	2.9
VRS-F-M42	121	4.6
VRS-F-M48	138	7

ORDER NUMBERS[Global Item Number/Local ERP Number SSNL]

WLL kg Angle 0°	VRS-F- M6	VRS-F- M8	VRS-F- M10	VRS-F- M12	VRS-F- M16	VRS-F- M20	VRS-F- M24	VRS-F- M30	VRS-F- M36	VRS-F- M42	VRS-F- M48
500 kg	2020836	-	-	-	-	-	-	-	-	-	-
800 kg	-	2020837	-	-	-	-	-	-	-	-	-
1000 kg	-	-	2020827	-	-	-	-	-	-	-	-
2000 kg	-	-	-	2020828	-	-	-	-	-	-	-
4000 kg	-	-	-	-	2020829	-	-	-	-	-	-
6000 kg	-	-	-	-	-	2020830	-	-	-	-	-
8000 kg	-	-	-	-	-	-	2020831	-	-	-	-
12000 kg	-	-	-	-	-	-	-	2020832	-	-	-
16000 kg	-	-	-	-	-	-	-	-	2020833	-	-
24000 kg	-	-	-	-	-	-	-	-	-	2020834	-
32000 kg	-	-	-	-	-	-	-	-	-	-	2020835

- Norms ISO 12100 EN 1677-1
- Main Material Steel
- Colour Pink
- Temperature Range -40° C to + 100° C
- Packaging Unit (PU) Content 1

SpanSet Nederland B.V.
 Plaza 10A 4782 SK
 Moerdijk Nederland
 Tel.: +31 (0) 168 38 68 00
 info@spanset.nl
 www.spanset.nl



Subject to technical changes. All rights reserved. No part of this technical data sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed via electronic systems without the written permission of SpanSet. This technical data sheet has been compiled with due care; SpanSet accepts no liability for errors or omissions. © SpanSet Nederland B.V.

**SpanSet
 Certified
 Safety**