


Ganci autobloccanti ad occhio Exoset G100

Gancio di sicurezza sotto carico a chiusura automatica con occhiello



Nome articolo breve	WLL kg [kg]	Diametro catena	WLL ton [t]	A [mm]	B [mm]	D [mm]	I [mm]
ESLH-6-10	1400	6 mm	1.4	108	70	20	21
ESLH-8-10	2500	8 mm	2.5	135	90	26	27
ESLH-10-10	4000	10 mm	4	165	108	30	34.5
ESLH-13-10	6700	13 mm	6.7	205	138.5	40.5	40
ESLH-16-10	10000	16 mm	10	255	170.5	50.5	50

Nome articolo breve	K [mm]	L [mm]	O [mm]	Peso netto [kg]
ESLH-6-10	43	141	28	0.5
ESLH-8-10	51	175	35.5	0.9
ESLH-10-10	64.3	212.5	45	1.5
ESLH-13-10	80	270	53.5	2.7
ESLH-16-10	104	331	62	5.7

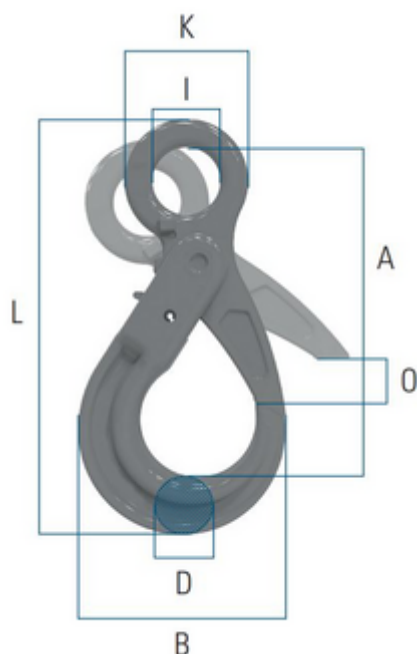

ARTICOLO[Global Item Number/Local ERP Number SSIT]

Diametro catena	ESLH-6-10	ESLH-8-10	ESLH-10-10	ESLH-13-10	ESLH-16-10
6 mm	2018566	-	-	-	-
8 mm	-	2018567	-	-	-
10 mm	-	-	2018568	-	-
13 mm	-	-	-	2018569	-
16 mm	-	-	-	-	2018570



■ Norme	EN 1677
■ Grado	100
■ Materiale principale	Acciaio
■ Colore	Blu
■ Intervallo di temperatura	-40°C / 200°C
■ Intervallo di temperatura	-40°F / 120°F
■ Packaging Unit (PU) Contenuto	1

