


Load Ring Weldable

A protected spring holds the suspension bracket in any position

Item Name short	WLL kg Angle 0° [kg]	WLL t Angle 0° [t]	WLL kg Angle 90° [kg]	WLL t Angle 90° [t]	A [mm]	B [mm]	C [mm]
C830X015	1500	1.5	1500	1.5	14	65	38
C830X025	2500	2.5	2500	2.5	16	75	45
C830X040	4000	4	4000	4	18	84	51
C830X067	6700	6.7	6700	6.7	24	117	67.3
C830X010	10000	10	10000	10	31	126	67
C830X016	16000	16	16000	16	45	174	100

Item Name short	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	Weight Net [kg]
C830X015	25	66	16	31	79	0.39
C830X025	27	77	18	34.5	91	0.59
C830X040	32	87	20	40	102	0.87
C830X067	44	115	26	58.5	141	2.23
C830X010	55	129	28.5	70.5	157	3.33
C830X016	69	190	42	87	219	9.28

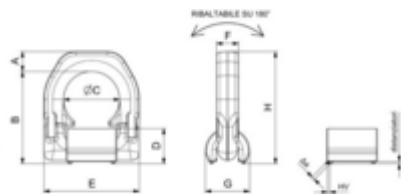

ORDER NUMBERS[Global Item Number/Local ERP Number SSUK]

WLL t Angle 0°	C830X010	C830X015	C830X016	C830X025	C830X040	C830X067
1.5 t	-	2032285	-	-	-	-
2.5 t	-	-	-	2032286	-	-
4 t	-	-	-	-	2032287	-
6.7 t	-	-	-	-	-	2032288
10 t	2032289	-	-	-	-	-
16 t	-	-	2032290	-	-	-

■ Norms	EN 1677
■ Grade	100
■ Main Material	Steel
■ Colour	Orange
■ Temperature Range	-20° C to + 200° C

SpanSet (UK) Limited
Telford Way
Middlewich Cheshire
CW10 0HX United Kingdom
+44 (0) 1606 737494
info@spanset.co.uk
www.spanset.co.uk



Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom

SpanSet
Certified
Safety

