



Rotating Eyebolt with clamp

Screwable Lifting Point 0.3t-20t, Steel Grade 100, Rotatable through 360°, foldable 90° eyebolt

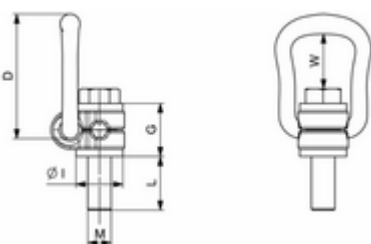

Item Name short	WLL kg [kg]	WLL t [t]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
C806X-M8 0.3t	300	0.3	57	34	10	78	24
C806X-M10 0.63t	630	0.63	57	34	10	78	24
C806X-M12 1t	1000	1	66	38	13.5	85	30
C806X-M16 1.5t	1500	1.5	66	38	13.5	85	30
C806X-M20 2.5t	2500	2.5	87	55	16	111	48
C806X-M24 4t	4000	4	87	55	16	111	48
C806X-M27 4T	4000	4	109	66	22.5	145	54
C806X-M30 5t	5000	5	109	66	22.5	145	54
C806X-M36 7t	7000	7	109	66	22.5	145	54
C806X-M36 8t	8000	8	136	78	28	190	62
C806X-M42 10t	10000	10	136	78	28	190	62
C806X-M42 15t	15000	15	169	97	36	242	68
C806X-M48 20t	20000	20	169	97	36	242	68

Item Name short	H [mm]	L [mm]	M [mm]	Max tightening torque [Nm]	Weight Net [kg]
C806X-M8 0.3t	26.5	15	8	30	0.27
C806X-M10 0.63t	26.5	15	10	60	0.29
C806X-M12 1t	33	23	12	100	0.5
C806X-M16 1.5t	33	24	16	150	0.51
C806X-M20 2.5t	42.5	31	20	250	1.25
C806X-M24 4t	42.5	37	24	400	1.3
C806X-M27 4T	58.5	37	27	400	3.15
C806X-M30 5t	58.5	45	30	500	3.25
C806X-M36 7t	58.5	50	36	700	3.3
C806X-M36 8t	72.5	59	36	800	5.9
C806X-M42 10t	72.5	75	42	925	6.5
C806X-M42 15t	87.5	63	42	1500	11.2
C806X-M48 20t	87.5	71	48	2000	11.6



ORDER NUMBERS[Global Item Number/Local ERP Number SSUK]

WLL kg	8 mm	10 mm	12 mm	16 mm	20 mm	24 mm	27 mm	30 mm	36 mm	42 mm	48 mm
300 kg	2029831	-	-	-	-	-	-	-	-	-	-
630 kg	-	2029832	-	-	-	-	-	-	-	-	-
1000 kg	-	-	2029833	-	-	-	-	-	-	-	-
1500 kg	-	-	-	2029834	-	-	-	-	-	-	-
2500 kg	-	-	-	-	2029835	-	-	-	-	-	-
4000 kg	-	-	-	-	-	2029836	2029838	-	-	-	-
5000 kg	-	-	-	-	-	-	-	2029839	-	-	-
7000 kg	-	-	-	-	-	-	-	-	2029840	-	-
8000 kg	-	-	-	-	-	-	-	-	2029841	-	-
10000 kg	-	-	-	-	-	-	-	-	-	2029842	-
15000 kg	-	-	-	-	-	-	-	-	-	2029843	-
20000 kg	-	-	-	-	-	-	-	-	-	-	2029844

- Grade 100
- Main Material Steel
- Colour Orange
- Packaging Unit (PU) Content 1

SpanSet (UK) Limited
Telford Way
Middlewich Cheshire
CW10 0HX United
Kingdom
+44 (0) 1606 737494
info@spanset.co.uk
www.spanset.co.uk



Subject to technical changes. All rights reserved. No part of this Technical Data Sheet may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed using electronic systems without the written permission of SpanSet. This Technical Data Sheet has been prepared with due care; SpanSet accepts no liability for errors or omissions. © SpanSet (UK) Limited - United Kingdom

**SpanSet
Certified
Safety**